



REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2013/02/05	Mike

NOTES

- MATERIAL:
 - Housing(UPPER):PBT, UL 94V-0, Color:Green.
 - Housing(LOWER):PA6T, UL 94V-0, Color:Ivory.
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Shield(DVI):SPCC.
 - Boardlock:Copper Alloy.
 - Bracket:Zinc Alloy.
 - Screw:Copper Alloy.
- FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Area.
 - Shell:Nickel Plated.
 - Shield(DVI):Tin Plated.
 - Boardlock:Tin Plated.
 - Bracket:Nickel Plated.
 - Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.



SPECIFICATIONS

- D-SUB
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000V AC(RMS)
 - Total Mating Force: 4.0 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -55°C to +85°C
- DVI
 - Voltage: 40 VAC(RMS) Max.
 - Current Rating: 1.5 Ampere per Contact
 - Contact Resistance: 20 Milliohms Max.
 - Insulation Resistance: 1000 Megohms Min.
 - Dielectric Withstanding Voltage: 500V DC(RMS)
 - Total Mating Force: 4.5 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -55°C to +85°C

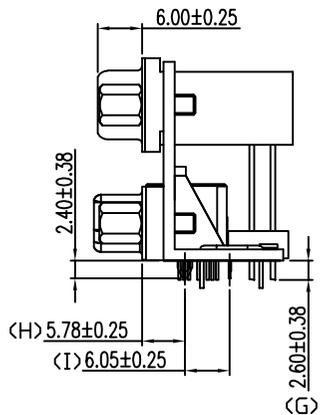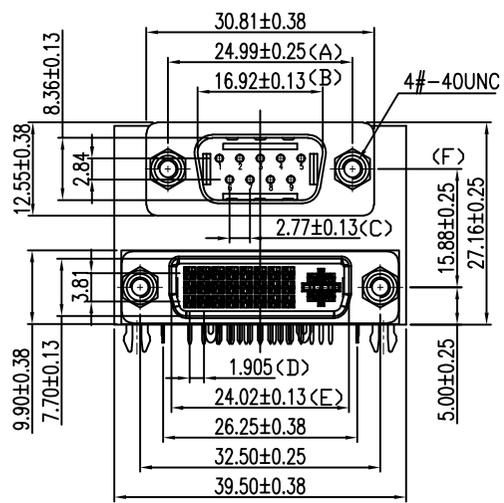

EAST-1PV4AP2A1XXCR

- 上层: IP:D-SUB 9P公头
- 下层: V4:DVI-I 24+5P
- 中心高: A: 15.88mm
- 螺丝: 1: 无螺丝
A: 锁螺丝 4.8*11.8
B: 附螺丝 4.8*11.8
E: 锁螺丝 5.8*11.8
F: 附螺丝 5.8*11.8
- 环保要求: R: ROHS
- 塑胶材质: 1: PBT
2: LCP
4: 上层PBT, 下层LCP
- 塑胶颜色: 1: 黑色
C: 上层黑色, 下层白色
F: 上层蓝色, 下层白色

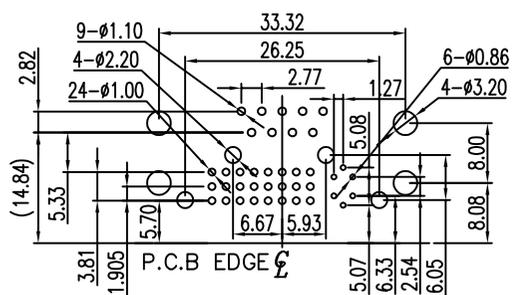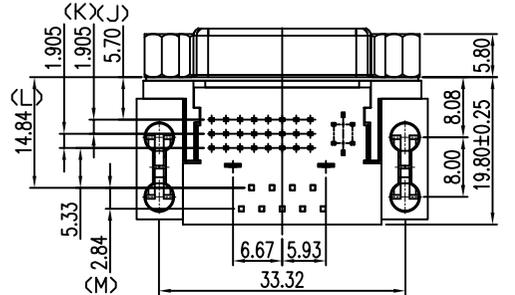


RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(P)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	INSPECTION COPY	深圳市东方御业科技有限公司 TEL:0755-27155560 WWW.DFYCONN.COM			
	DRAWN: qinx	2013/02/05	TITL: D-SUB HIGH DENSITY 9 MALE /DVI-I FEMALE RIGHT ANGLE (RoHS)		
	CHECKED: chenlei	2013/02/05	PART NO: EAST-1PV4AP2A1XXCR		
	APPROVED: chenlei	2013/02/05	UNIT: mm	SCALE: N/A	SHEEL: 1/1

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

包装图

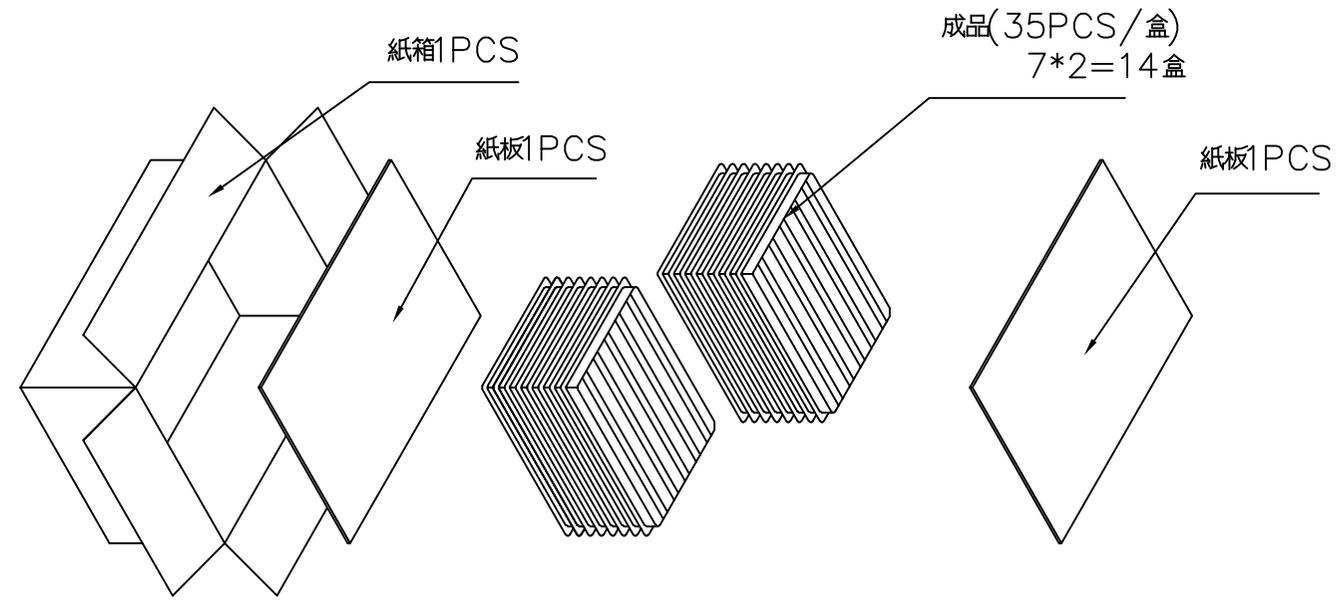

加厚纸箱: 45*31*22.5CM

EAST-1PV4AP2A1XXCR	X.XX	X.XX	35*14=420
料 號	N.W: (KG)	G.W: (KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: Qinkx	2018/01/20	TITLE: D-SUB 双层系列包装图	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue ELECTRONIC CO., LTD., SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2018/01/20	PART NO: EAST-1PV4AP2A1XXCR	
	APPROVED: Chenl	2018/01/20	UNIT: mm	SCALE: N/A
			SHEET: 1/1	REV: A

www.dfyconn.com