





REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

一、MATERIAL:

- 1.Insulator:PBT+30%Glass Fiber (UL94V-0)
- 2.Contact:Brass
- 3.Contact Plated:Glod Flash over Tin Or Glod Plated Or Tin Plated
- 4.Shell:Stell,Nickel Plated

二、SPECIFICATION:

- 1.Current Rating:5 AMPS
- 2.Insulation Resistance: 1000MΩ MIN. At 500VDC
- 3.Dielectric Strength: 500V for One minute
- 4.Operation Temperature: -55° C~+105° C.

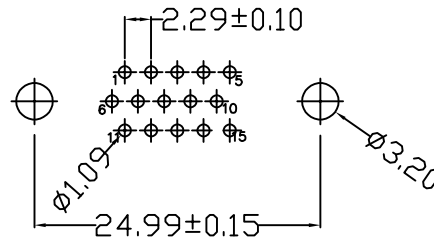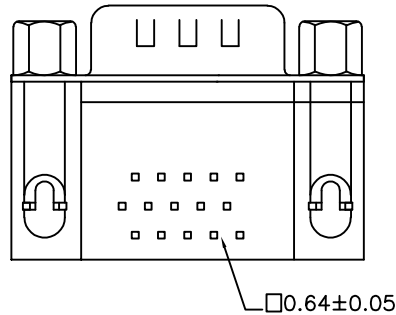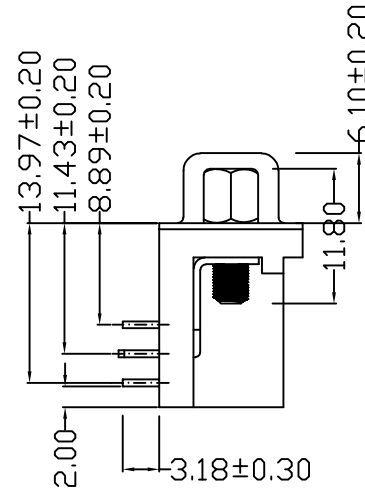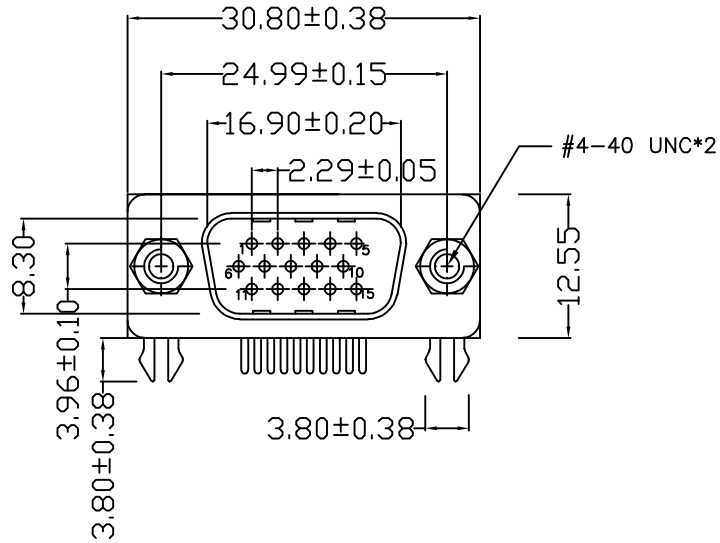

EAST-HDF15P-8.89BK-

塑胶颜色:
BK: 黑色
BE: 蓝色

螺丝

- 1: 锁螺丝4.8*11.8
- 2: 无螺丝
- 3: 附螺丝4.8*11.8
- 4: 锁螺丝5.8*11.8
- 5: 附螺丝5.8*11.8

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.20 Angle ± 3°		COSTOMER COPY		深圳市东方御业科技有限公司 Tel:0755-2715560 WWW.DFYCONN.COM			
DRAWN: Qinkx		2017/09/10		TITAL: HDF 15P 公头8.89直锁式			
CHECKED: Chenl		2017/09/10		PART NO: EAST-HDF15P-8.89XX-X			
APPROVED: Chenl		2017/09/10		UNIT: mm		SCALE: N/A	SHEEL: REV.

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.