

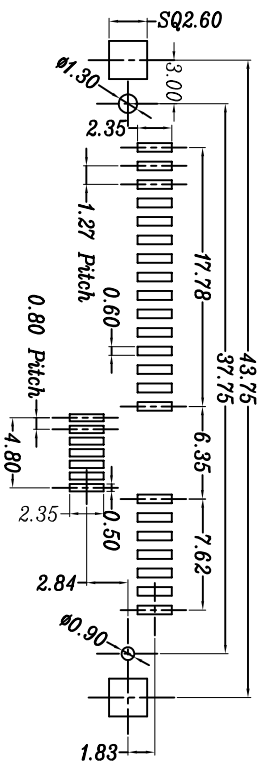
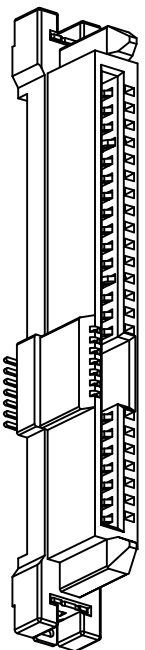
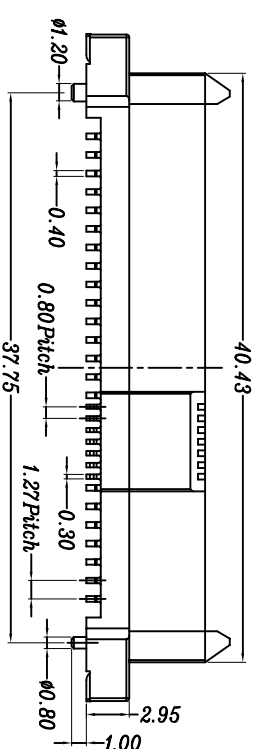
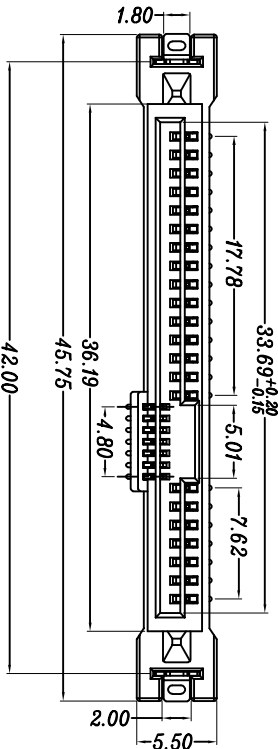



REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

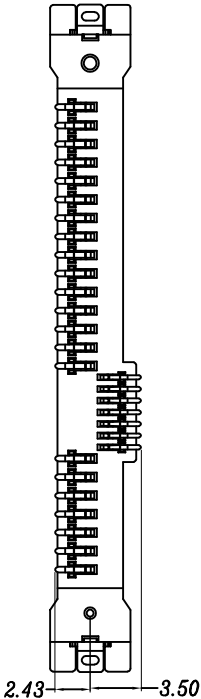

RECOMMENDED P.C.B LAYOUT

T=±0.05

EAST-SAS2918SDS 14L0CR

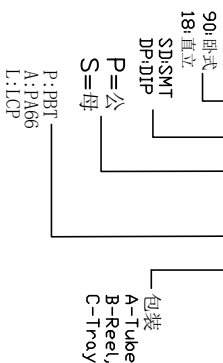

- NOTE:
1. MATERIAL:
- HOUSING: LCP 30% G/F UL 94V-0 ;BLACK
- CONTACT(1.27): C5191R-H,T=0.30±0.01mm
- CONTACT(0.8): C5191R-H,T=0.25±0.01mm
- PEG: C2680R-H,T=0.30±0.01mm
2. MECHANICAL:
- MATING: 25N MAX.
- WITHDRAWAL FORCE: 5N MIN.
- DURABILITY: 500 CYCLES.
3. ELECTRICAL:
- CURRENT RATING: 1.5 A
- CONTACT RESISTANCE: 30 Milliohms MAX.
- INSULATION RESISTANCE: 1000 Megohms MIN.
- WITHSTANDING VOLTAGE: 500 VAC
4. FINISH:
- CONTACT: 1u" GOLD MIN. PLATING ON CONTACT AREA
- 1000" MIN. TIN PLATING ON SOLDER TAILS
- 50u" MIN. NICKEL UNDERPLATING OVER ALL
- PEG: 100u" MIN. TIN PLATING ON SOLDER AREA
- 50u" MIN. NICKEL UNDERPLATING OVER ALL
5. ENVIRONMENTAL:
- OPERATURE RANGE: -25°C TO +85°C

TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER COPY		深圳市东方御业科技有限公司	
X.	—	DRAWN:		WWW.DFYCDNN.COM TEL:0755-27155560	
X.X	± 0.38	CHECKED:		SAS 29P 180度SMT	
X.XX	± 0.25	APPROVED:		EAST-SAS2918SDS14L0CR	
X.XXX	± 0.10	QUINAKING		SCALE: N/A	
Angle	±1°			SHEET: 1:1	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue Electronic Co., Ltd. SHALL NOT BE REPRODUCED.		PART NO:		REV:	
		2017/09/10			
		2017/09/10			