

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2017/09/10	Mike

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance:5000 Medohms Minimum.at DC 500V.
Contact Resistaance:25 Milliohms Maximum.
Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:




Contact Insertion Force:341 g.Maximum.
Contact Separation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.
Insulator: NTLON 9T UL 94V-0 Rated.
Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
Shell:Nickel Plated.

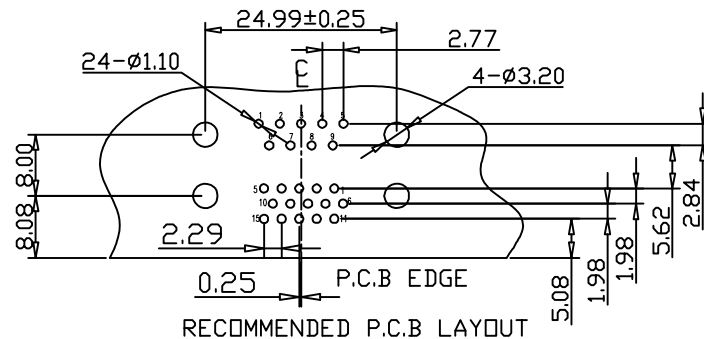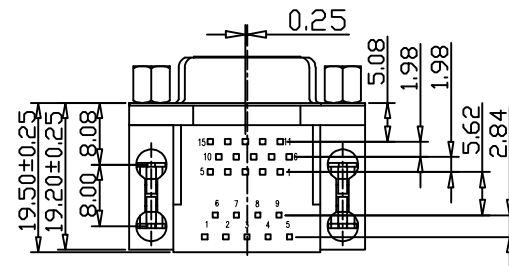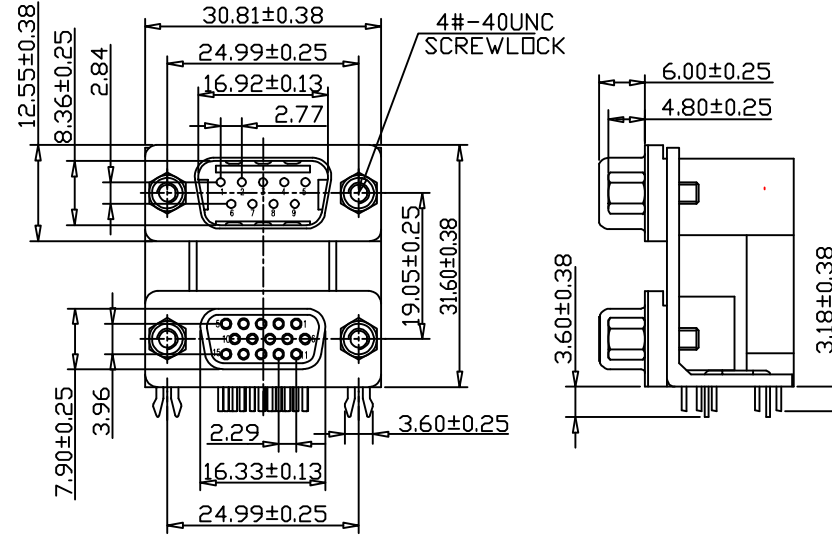

EAST-B1N2AP2A1XX

中心高
A:15.88mm
B:19.05mm


塑胶颜色:
1: 黑色
C:上层绿色, 下层蓝色
F:上层绿色, 下层黑色
J:上层黑色, 下层蓝色

螺丝:
1:无螺丝
A:锁螺丝4.8*11.8
B:附螺丝4.8*11.8
E:锁螺丝5.8*11.8
F:附螺丝5.8*11.8

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	COSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560			
	DRAWN:	Qinx	2017/09/10	TITAL: DR 9P对HDR 15PIN双胞胎成品-2		
	CHECKED:	Chenl	2017/09/10	PART NO: EAST-B1N2AP2A1XX		
	APPROVED:	Chenl	2017/09/10	UNIT: mm	SCALE: N/A	SHEEL: 1/1
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF ShenzhenDongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.				REV: A		

REV.	ECN NO.	MODIFY	MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		2018/01/20	Mike

包 裝 圖

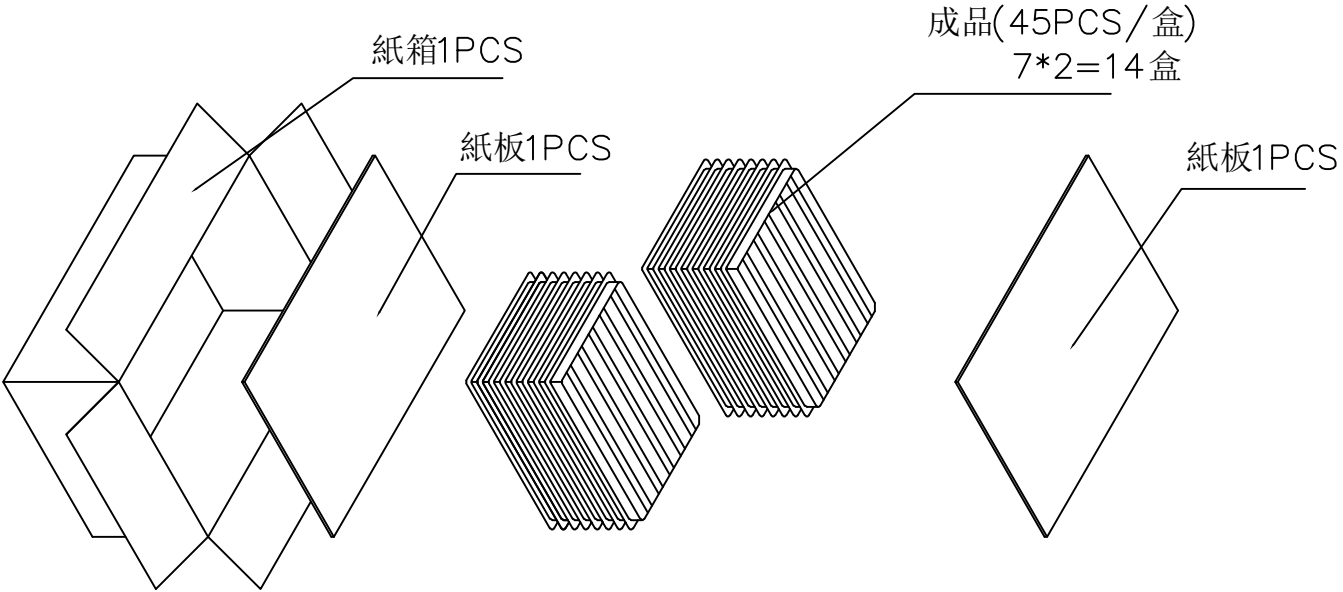

加厚紙箱: 45*31*22.5CM

EAST-B1N2AP2A1XX	X.XX	X.XX	45*14=630
料	號	N.W: (KG)	G.W: (KG) QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560				
	DRAWN:		TITAL:				
	Qinkx	2018/01/20	D-SUB双层系列包装图 (RoHS)				
	CHECKED:		PART NO:				
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.	Chenl	2018/01/20					
	APPROVED:						
	Chenl	2018/01/20	UNIT:		SCALE:	SHEEL:	REV.
			mm	N/A	1/1	A	