

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

1. MATERIAL:

- 1.1 UPPER HOUSING: PBT+30%G.F, UL94V-0, COLOR: GREEN 3395C .
- LOWER HOUSING: PBT+30%G.F, UL94V-0, COLOR: PURPLE(2715C) .
- 1.2 COVER: PBT+30%G.F, UL94V-0, COLOR: BLACK.
- 1.3 CONTACT: COPPER ALLOY (T=0.2)

80u" MIN MATTE TIN PLATED IN OVERALL
50u" MIN NICKEL UNDERPLATED OVERALL.

- 1.4 SHELL: SPCC (T=0.3)



60u" MIN Tin UNDERPLATED OVERALL.

2. ELECTRICAL:


- 2.1 CONTACT CURRENT RATING: 1 Amp.
- 2.2 CONTACT RESISTANCE: 30mΩ Max.
- 2.3 INSULATION RESISTANCE: 500MΩ min.
- 2.4 DIELECTRIC WITHSTANDING: AC 500V min.
- 2.5 OPERATING TEMPERATURE: -25°C~+85°C.

3. NOTES:

- 3.1 ALL COMPONENTS ARE RoHS COMPLIANT.
- 3.2 RESISTANCE TO SOLDERING HEAT: 255°C FOR 5 SECONDS, AND ONLY FOR WAVE SOLDERING PROCESS.

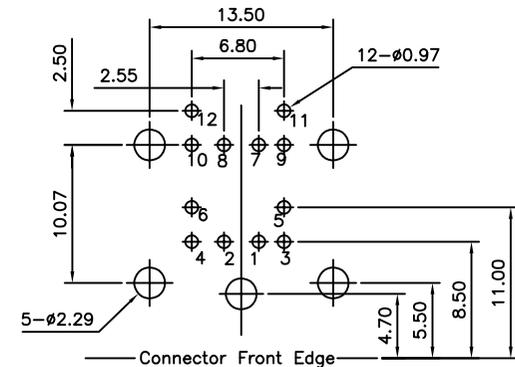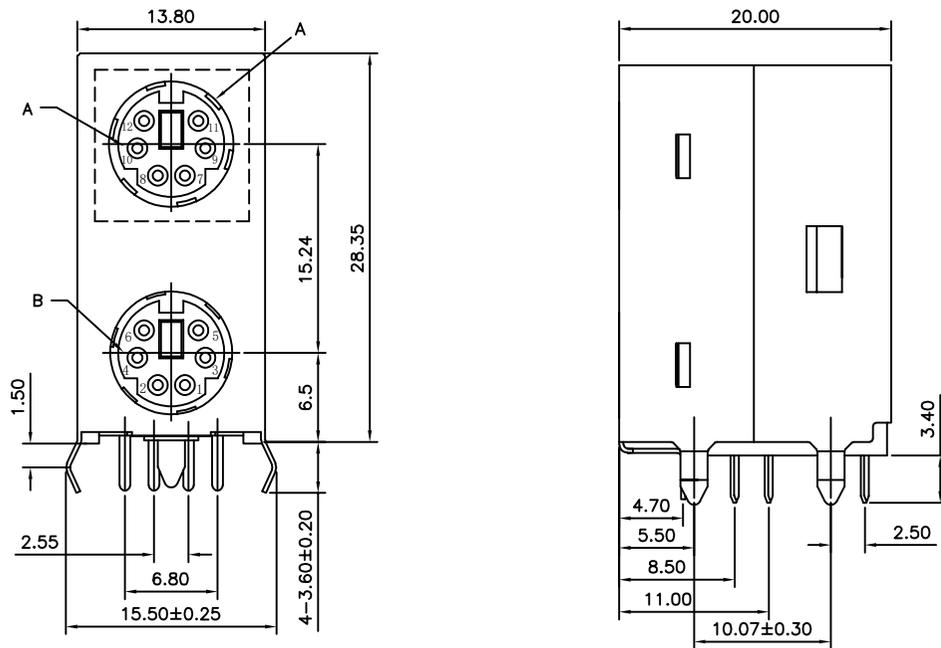

RECOMMENDED P.C.B LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

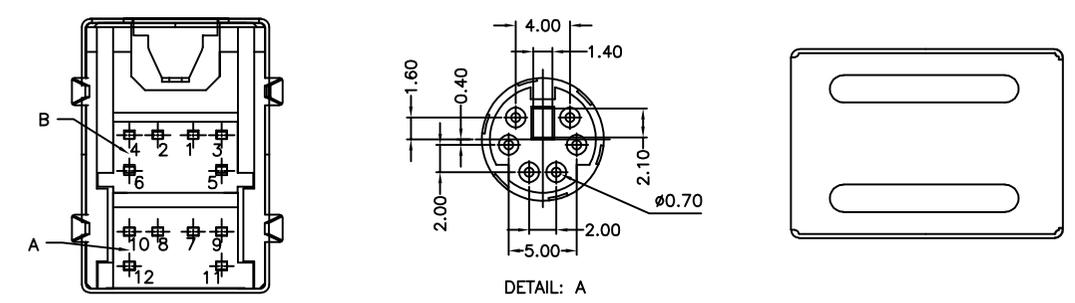

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ±1°	COSTUMER COPY	深圳市东方御业科技有限公司 www.dfyyconn.com Tel:0755-27155560		
	DRAWN: CHENLEI	2017/09/10	TITIAL: 双层MINI DIN上绿下紫铁壳 外壳脚外八型无LOGO (RoHS)	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.	CHECKED: CHENLEI	2017/09/10	PART NO: EAST-032A	
	APPROVED: QINKAIXING	2017/09/10	UNIT: mm	SCALE: N/A
			SHEEL: 1:1	REV.