





REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

NOTES:


- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 m Ω MAX.;
- INSULATION RESISTANCE: 1000 Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;

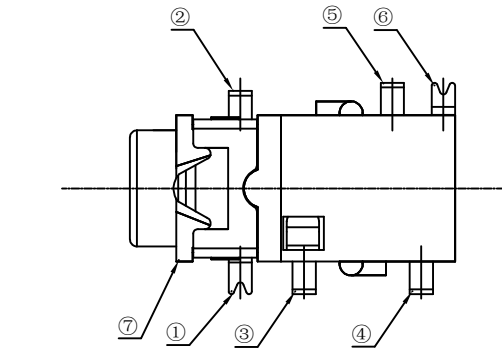

SCHEMATIC

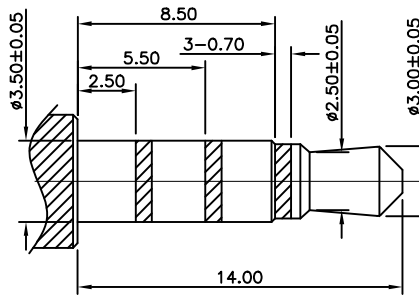

($\phi 3.50$ mm 4 POLE PLUG DETAIL DRAWING)

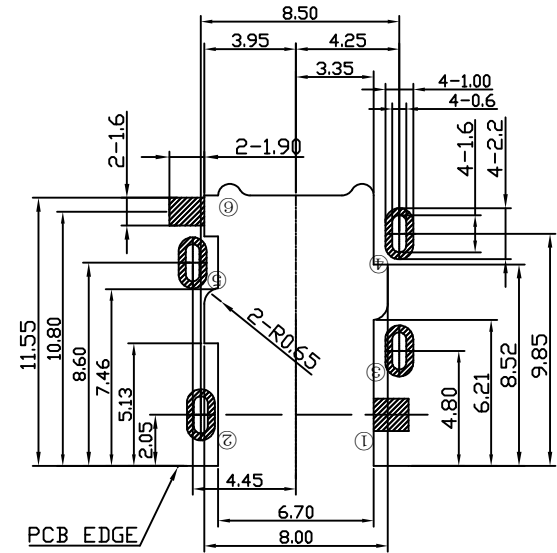

RECOMMENDED PCB LAYOUT

ITEM	PART NAME	Q'TY	MATERIAL	REMARK
⑦	HOUSING	1	PA9T COLOR BLACK	
⑥	CONTACT 6#	1	STAINLESS STEEL; NICKEL (40u"MIN.) UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.2
⑤	CONTACT 5#	1	STAINLESS STEEL; NICKEL (40u"MIN.) UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.2
④	CONTACT 4#	1	STAINLESS STEEL; NICKEL(40u"MIN.) UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
③	CONTACT 3#	1	STAINLESS STEEL; NICKEL(40u"MIN.) UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
②	CONTACT 2#	1	STAINLESS STEEL; NICKEL(40u"MIN.) UNDER PLATING OVERALL;GOLD FLASH ON OVERALL;	T=0.2
①	CONTACT 1#	1	STAINLESS STEEL; NICKEL(40u"MIN.) UNDER PLATING OVERALL;GOLD FLASH ON OVERALL;	T=0.2

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle $\pm 1^\circ$		COSTOMER COPY		深圳市东方御业科技有限公司 www.dfyyconn.com TEL:0755-27155560	
DRAWN: CHENLEI		2017/09/10		TITL: 3.5mm AUDIO JACK沉板1.2 板上3.0 头部长1.2两脚贴片四脚插件 (RoHS)	
CHECKED: CHENLEI		2017/09/10		PART NO: EAST-2308G-06FB-APA	
APPROVED: QINKAIXING		2017/09/10		UNIT: mm	
				SCALE: N/A	
				SHEEL: 1:1	
				REV.	