

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

NOTES:

1.ELECTRONIC:

CONTACT RESISTANCE: 30mohm MAX

INSULATION RESISTANCE: 1000 Mohm MIN

WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:

DURABILITY: 5000 CYCLE.

3.ENVIRONMENT CHARACTERISTICS:

OPERTING TEMPERATURE:-55°C TO +105°C

4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

5. 标标"▲"符的的尺寸为重点检验尺寸;

6.MATERIAL LIST:







3	SHELL	1	STAINLESS SUS201	NI PLATED
2	CONTACT	9	COPPER ALLOY	AU/TIN PLATED
1	HOUSING	1	PA9T BLUE	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

EAST-USB2H42630PBK1R

塑胶颜色:

BK: 黑色

BE: 蓝色

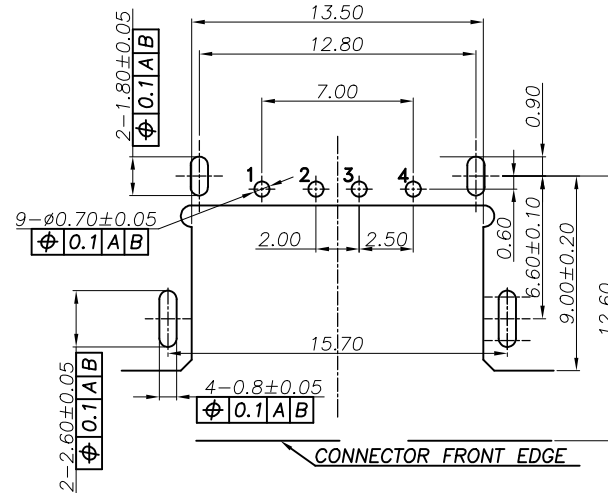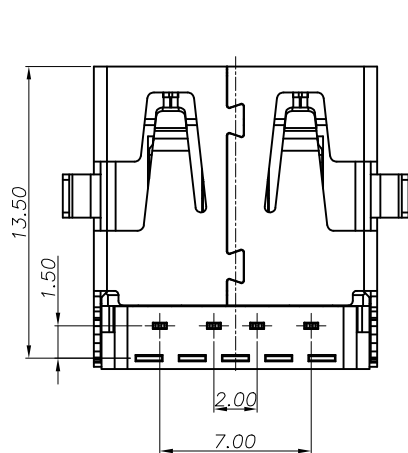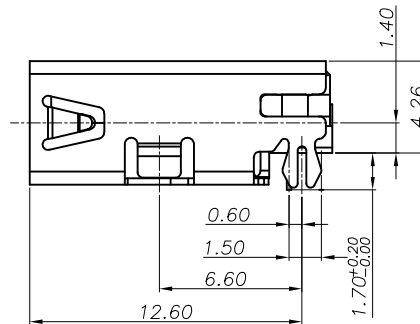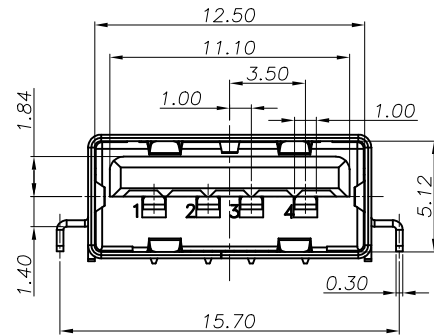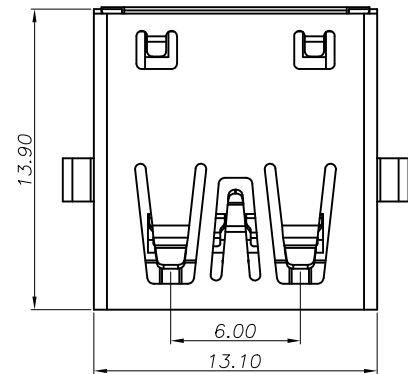

RECOMMENDED PCB LAYOUT

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle ±1°		COSTOMER COPY		深圳市东方御业科技有限公司 www.dfyyconn.com TEL:0755-27155560	
DRAWN: CHENLEI		2017/09/10		TITAL: USB 2.0 AF沉板板上4.26mm中心高1.40 DIP	
CHECKED: CHENLEI		2017/09/10		PART NO: EAST-USB2H42630PXX1R	
APPROVED: QINKAIXING		2017/09/10		UNIT: mm	SCALE: N/A
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD., SHALL NOT BE REPRODUCED.				SHEET: 1:1	REV.