
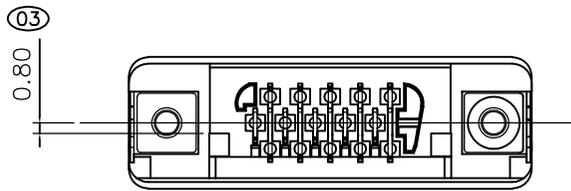
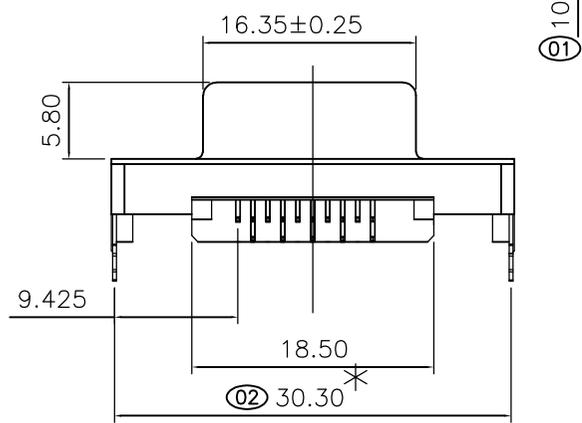
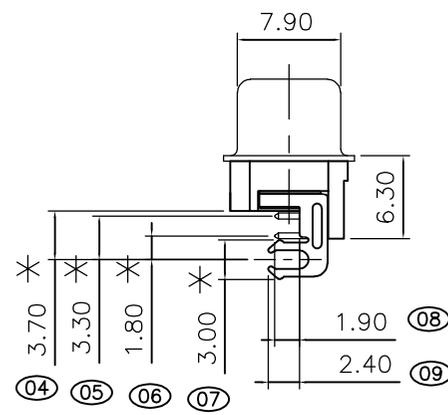



REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

规格:  
 接触阻抗:30milliohms MAX  
 耐电压:500V AC  
 绝缘阻抗:1000 MEGAohms MIN  
 寿命:5000次, 插拔速度300次/小时  
 插拔力: 插入力MAX:4.5Kgf Max.  
 拔出力MIN:0.45Kgf Min.  
 工作温度:-30°C~+85°C  
 盐雾测试: 24H

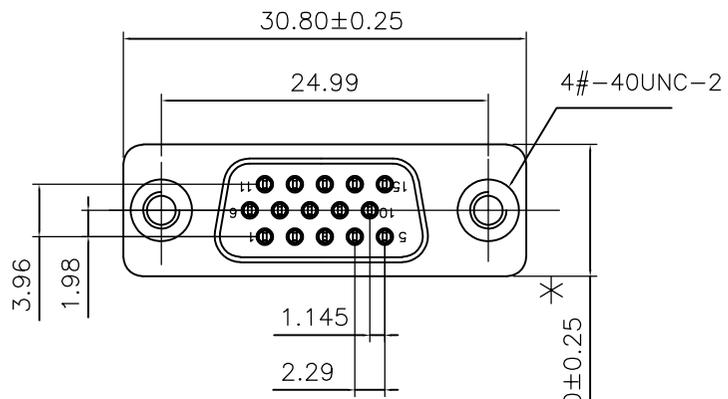

EAST-SLIM150020-XXX

- 001 灰色铁壳镀镍
- 003 蓝色铁壳镀镍
- 005: 黑色铁壳镀镍
- 螺丝:
- 0: 锁螺丝
- 1: 无螺丝
- 2: 附螺丝

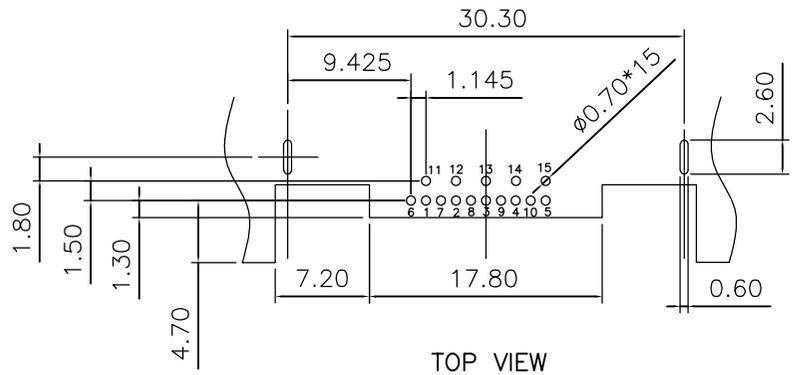

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)  
 PCB LAYOUT TOLERANCE :±0.05(PCB T=1.2mm)

5	FORK	BRASS	Matte Tin Plated
4	RIVET	BRASS	Ni Plated
3	SHELL	SPCC	Ni Plated
2	TERMINAL	C2680	Au/Matte Sn Plated
1	HOUSE	PA66	BLUE UL 94V-0

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 X. ---  
 X.X ± 0.38  
 X.XX ± 0.25  
 X.XXX ± 0.10  
 Angle ±1°

CUSTOMER COPY  
 深圳市东方御业科技有限公司  
 WWW.DFYCONN.COM TEL:0755-27155560

DRAWN: CHENLEI 2017/09/10  
 CHECKED: CHENLEI 2017/09/10  
 APPROVED: QINKAIXING 2017/09/10

TITIAL: SLIM VGA 15P F  
 反向沉板 CL-0.8 (RoHS)  
 PART NO: EAST-SLIM150020-XXX

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.

UNIT: mm  
 SCALE: N/A  
 SHEEL: 1:1  
 REV.